



MANGUERAS INDUSTRIALES INDUSTRIAL HOSES

Manguera para Compresión de Aire COMPRESSED AIR HOSE

CONSTRUCCIÓN

Tubo Interno: PVC transparente, **Refuerzo:** Malla textil (terylene), **Cubierta:** PVC transparente, **Aplicación:** Distribución de alimentos y bebidas, agua potable, aire, líneas de respiración, envases y equipos, líneas de lubricación y otras aplicaciones de flujo que requieran inspección visual, **Rango de Temperatura:** -5°C + 65 °C

CONSTRUCTION

Inner Tube: Transparent PVC, **Reinforcement:** One braid of terylene, **Cover:** Transparent PVC
Application: Food and beverage dispensing, potable water, air, breathing lines, packaging and equipment, lube lines and other visual flow applications
Temperature Range: -5°C + 65 °C



PVC GRADO ALIMENTICIO
FDA PVC H02581


Código Code	Diámetro Interno Hose I.D.		Diámetro Externo Hose O.D.		Presión Max. de Trab. Working Pressure		Presión Min. de Ruptura Burst Pressure		Radio de Curvatura Bending Radius		Rollo Roll	
	in	mm	mm	in	bar	psi	bar	psi	mm	in	mts	fts
H02581-251	1/4"	6.0	12	0.47	10	145	30.0	435	30	1.18	100	328.08
H02581-313	5/16"	8.0	13.0	0.51	10	145	30.0	435	40	1.57	100	328.08
H02581-381	3/8"	10.0	16.0	0.63	9	131	27.0	393	50	1.97	100	328.08
H02581-501	1/2"	13.0	19.0	0.75	8	116	24.0	348	65	2.56	50	164.04
H02581-631	5/8"	16.0	22.0	0.87	8	116	24.0	348	80	3.15	50	164.04
H02581-751	3/4"	19.0	26.0	1.02	8	116	24.0	348	95	3.74	50	164.04
H02581-1001	1"	25.0	33.0	1.30	6	87	18.0	261	125	4.92	50	164.04
H02581-1251	1.1/4"	32.0	41.0	1.61	5	73	15.0	219	160	6.3	40	131.23
H02581-1501	1.1/2"	38.0	48.0	1.89	4	58	12.0	174	190	7.48	40	131.23
H02581-2001	2"	50.0	62.0	2.44	4	58	12.0	174	250	984	40	131.23

CONSTRUCCIÓN

Tubo Interno: Polímero termoplástico grado alimenticio, **Refuerzo:** Polímero termoplástico rígido color blanco, **Cubierta:** Polímero termoplástico grado alimenticio
Aplicación: Succión y descarga de alimentos de consumo humano, entre tanques de la industria alimenticia o camiones cisternas de suministro y descarga en maquinarias en la industria farmacéutica, **Rango de Temperatura:** -5°C + 60 °C

CONSTRUCTION

Inner Tube: Food grade thermoplastic polymer, **Reinforcement:** White rigid thermoplastic polymer, **Cover:** Food grade thermoplastic polymer, **Application:** Suction and discharge of food for human consumption, between tanks of food industry or supply cisterns and discharge in pharmaceutical industry, **Temperature Range:** -5°C + 60 °C

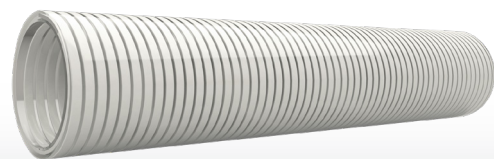

PVC PARA BEBIDAS
PVC Beverages H02582

Código Code	Diámetro Interno Hose I.D.		Diámetro Externo Hose O.D.		Presión Max. Trab. Working Pressure		Presión Min. Ruptura Burst Pressure		Radio de Curvatura Bending Radius		Rollo Roll	
	in	mm	mm	in	bar	psi	bar	psi	mm	in	mts	fts
H02582-1000	1"	25.4	31.0	1.22	10.34	150	31.0	450	200	7.9	50	164.04
H02582-1250	1.1/4"	31.8	37.9	1.49	8.96	130	26.8	390	235	9.3	50	164.04
H02582-1500	1.1/2"	38.1	44.8	1.76	6.89	100	20.7	300	250	9.8	50	164.04
H02582-2000	2"	50.8	57.5	2.26	6.89	100	20.7	300	300	11.8	50	164.04
H02582-3000	3"	76.2	85.4	3.36	5.52	80	16.6	240	470	18.5	30	98.43